




# PR26e

## Production Range

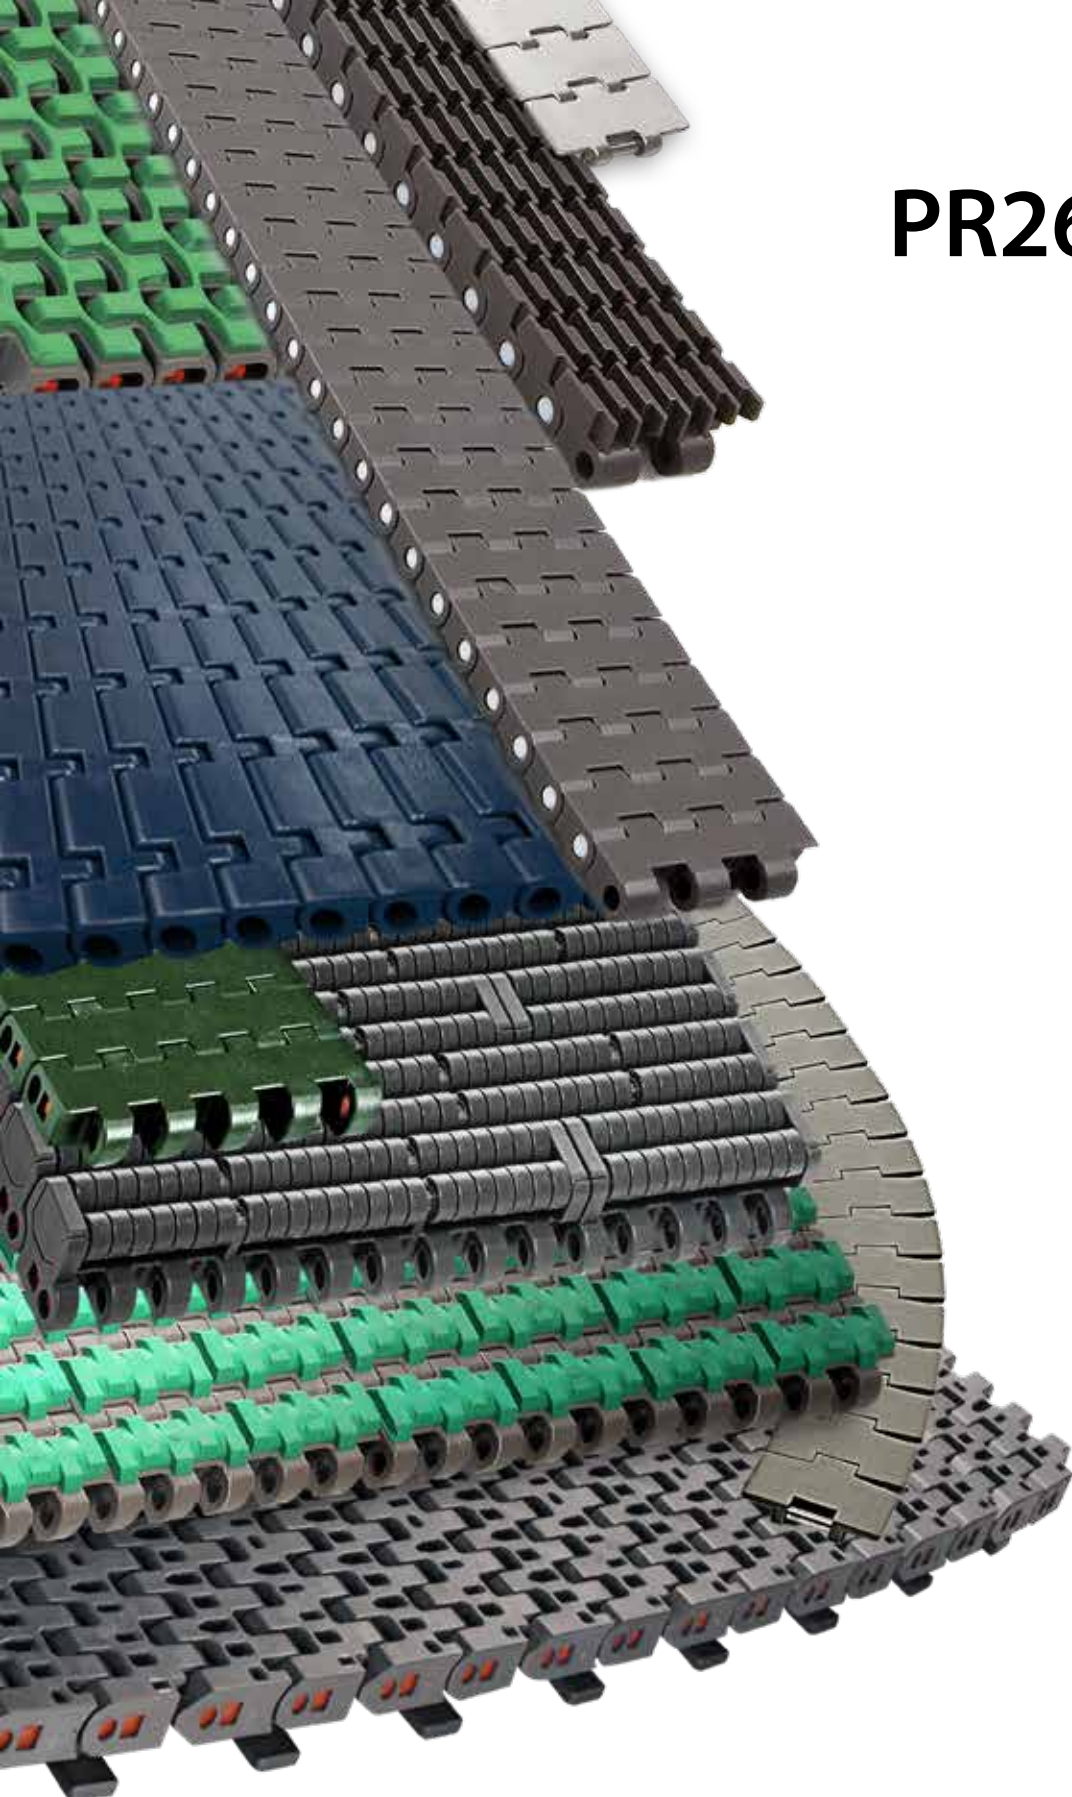

# ***FliteTop*® Matveyor® ULTOP®**



# Materials

## Steel and Thermoplastic Chains, Modular Belts

|               | Type                                                                                                                          | Description                                              | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STEEL         |  S                                           | <b>Carbon Steel</b>                                      | Through hardened carbon steel.<br>Surface and core hardness of 43 HRC. Excellent strength and wear resistance.<br>Not suitable in presence of water.                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|               |  SS - 4                                      | <b>Ferritic Stainless Steel</b>                          | Cold rolled ferritic stainless steel.<br>Good wear, mechanical and corrosion resistance.<br>For food & beverage applications.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|               |  PRIMA                                       | <b>Superior Grade Ferritic Stainless Steel</b>           | Superior grade of cold rolled special ferritic stainless steel.<br>Special Cr-Ni alloy offering very good wear and mechanical properties.<br>Particularly suitable for high productivity lines (combiners and inliners).                                                                                                                                                                                                                                                                                                                                                               |
|               |  SS                                          | <b>Austenitic Stainless Steel</b>                        | Cr-Ni austenitic cold rolled stainless steel.<br>It guarantees the best corrosion resistance to withstand chemical attack.<br>It offers very good wear resistance, due to work hardening and homogeneous chemical structure.                                                                                                                                                                                                                                                                                                                                                           |
| ACETAL<br>POM |  WA<br>White                                 | <b>White Acetal</b>                                      | Delrin® produced by Delrin (former DuPont™) homopolymer acetal resin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               |  UP<br>Dark Brown                            | <b>Ultra Performance Homopolymer Delrin®</b>             | Delrin® produced by Delrin (former DuPont™) Ultra Performance special homopolymer acetal resin.<br>Particularly suitable for applications where low coefficient of friction and contained dusting are needed.                                                                                                                                                                                                                                                                                                                                                                          |
|               |  DK <sup>2</sup><br>Dark Green             | <b>Special Delrin® Reinforced with Kevlar®</b>           | <b>Next generation material, based on a Delrin® acetal resin reinforced with Kevlar®,</b> developed by REGINA and Delrin (former DuPont™), able to reach the lowest coefficient of friction with maximum wear resistance. Thanks to the superior properties of <b>DK<sup>2</sup></b> , the usage of lubricants can be drastically reduced or even eliminated without losing performance in conveyor applications.                                                                                                                                                                      |
|               |  <b>NEW</b><br>e-FAST <sup>®</sup><br>Blue | <b>Ecological Friction Abating Sliding Thermoplastic</b> | Ultimate dry running homopolymer acetal resin developed combining REGINA field expertise with Delrin (former DuPont™) centenarian acetal resin knowledge. Today's standards for high performance filling lines require a combination of high speed and high productivity, while reducing or eliminating lubrication. REGINA <b>e-FAST<sup>®</sup></b> material is capable of exceeding such standards, thanks to its unique characteristic of delivering a much lower and constant coefficient of friction over time in dry or almost dry running conditions vs. other plastic chains. |
|               |  AS<br>Black                               | <b>Antistatic Acetal Resin</b>                           | Conductive acetal resin particularly suitable for all applications where static charges on the chain must be avoided.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| POLYAMIDE     |  AR<br>Black                               | <b>Abrasion Resistance Polyamide</b>                     | Suitable for glass manufacturing applications.<br>Reinforced polyamide with excellent wear resistance and low dusting.<br>Only for dry running applications.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| POLYPROPYLENE |  P<br>Light Blue                           | <b>Reinforced Polypropylene</b>                          | For FliteTop® Chains.<br>Reinforced polypropylene that guarantees the best corrosion resistance to withstand chemical attack and an optimum high temperature resistance.                                                                                                                                                                                                                                                                                                                                                                                                               |
|               |  PP<br>Grey                                | <b>Special Polypropylene</b>                             | For Matveyor® Belts.<br>Special polypropylene that guarantees the best corrosion resistance to withstand chemical attack and an optimum high temperature resistance.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| POLYESTER     |  ULF<br>Light Grey                         | <b>Ultra Low Friction Polyester Resin</b>                | Polyester resin that offers good mechanical strength in combination with low coefficient of friction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

Delrin® is a registered trade mark of Delrin USA, LLC.  
DuPont™ Kevlar® is a registered trade mark of E.I. DuPont De Nemours and Associates.

## Rubbers

|        | Type                    | Description                                 | Features                                                                                                                                                                                                                                          |
|--------|-------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RUBBER | <b>NBR</b><br>Black     | <b>NBR Rubber</b>                           | NBR Rubber with hardness of 70 ShA, applied on stainless steel chains, guarantees an excellent product grip on inclined/declined conveyors, high wear resistance and superior resistance against sanitizers ordinary used in bottling industries. |
|        | <b>TPE</b><br>Green     | <b>Thermoplastic Rubber</b>                 | Special Thermoplastic rubber with hardness from 50 ShA up to 70 ShA and optimum wear resistance that guarantees exceptional product grip in inclined/declined conveyors and elevators/ lowerators, extending life without losing elasticity.      |
|        | <b>TPE</b><br>Grey      |                                             |                                                                                                                                                                                                                                                   |
|        | <b>TPE</b><br>Dark Grey |                                             |                                                                                                                                                                                                                                                   |
|        | <b>HS</b><br>Grey       | <b>Heat Stabilized Thermoplastic Rubber</b> | Special Thermoplastic rubber resistant to high temperatures, with hardness from 45 ShA to 60 ShA, for rinsers and cap sterilizer applications.                                                                                                    |
|        | <b>HS</b><br>Dark Grey  |                                             |                                                                                                                                                                                                                                                   |
|        | <b>EPDM</b><br>Black    | <b>EPDM Rubber</b>                          | For gripper chain series.<br>EPDM rubber with hardness of 60 ShA guarantees an excellent grip and high temperature resistance.                                                                                                                    |

## Base Roller Chains

|       | Type                                                                                | Description                          | Features                                                                                                                                                                                                                          |
|-------|-------------------------------------------------------------------------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STEEL |  | <b>Carbon Steel</b>                  | Through hardened carbon steel.<br>Excellent strength and wear resistance.                                                                                                                                                         |
|       |  | <b>Stainless Steel</b>               | Stainless Steel for the best corrosion resistance to withstand chemical attack.<br>Prelubricated with high performance lube suitable for the food industry (USDA H1 approved) which guarantees long-lasting effect for the chain. |
|       |  | <b>Maintenance free carbon steel</b> | For "lube-free" applications.<br>ENDURO maintenance free chains outlast standard chains without periodic lubrication. The unique technology and "heavy wall" design of the sintered bushing ensures excellent wear resistance.    |
|       |  | <b>Carbon Steel Nickel Plated</b>    | Through hardened carbon steel and electroless nickel plating for good corrosion resistance.<br>Excellent strength and wear resistance.                                                                                            |

## Sprockets and Turning Discs

|            | Type                | Description                 | Features                                                                                                                                       |
|------------|---------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| POLYAMIDE  | <b>PA</b><br>White  | <b>Polyamide</b>            | For sprockets.<br>Machined polyamide that guarantees toughness combined with wear and abrasion resistance.                                     |
|            | <b>PGF</b><br>Black | <b>Reinforced Polyamide</b> | For sprockets and turning discs.<br>Moulded polyamide reinforced with glass fibers allowing higher strength and excellent abrasion resistance. |
| ACETAL POM | <b>WA</b><br>White  | <b>White Acetal</b>         | For sprockets 3000 series.<br>Delrin® produced by Delrin (former DuPont™) homopolymer acetal resin.                                            |

## Curves and Static Nosebar

|              | Type                                                                              | Description                                     | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------|-----------------------------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| POLYETHYLENE |  | <b>UHMWPE</b>                                   | For Magnetic and Low Pin Center curves.<br>Ultra high molecular weight polyethylene (about 7 milion gr/mole) with good wear resistance and low coefficient of friction.                                                                                                                                                                                                                                                                                             |
|              |  | <b>High performance Self-Lubricating UHMWPE</b> | For Magnetic, TAB, Bevel and Low Pin Center curves.<br>New ultimate Ultra High Molecular Weight Polyethylene (molecular density of 9.000.000 g/mol), developed and produced in-house by REGINA. Thanks to special lube additives compounded with the material, provides superior sliding performance and excellent wear resistance of chains and belts in most critical conveying applications characterized by high-speeds, dry running conditions, high abrasion. |
|              |  | <b>UHMWPE</b>                                   | For Bevel and TAB curves.<br>Ultra high molecular weight polyethylene with good wear and abrasion resistance.                                                                                                                                                                                                                                                                                                                                                       |
|              |  | <b>Self-Lubricating UHMWPE</b>                  | For ½" pitch belts nosebar.<br>High grade of ultra high molecular weight polyethylene (about 7-9 milion gr/mole) with optimum wear and abrasion resistance, combined with advanced lubricant for excellent sliding properties.                                                                                                                                                                                                                                      |
| POLY AMIDE   |  | <b>Oil-Filled PA</b>                            | For Magnetic, TAB, Bevel and Low Pin Center curves.<br>Special high grade and oil-filled polyamide, with superior abrasion resistance and extremely high PV limit. Dry running only.                                                                                                                                                                                                                                                                                |

## Conveyor Components

|               | Type                                                                                | Description                                     | Features                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACETAL POM    |  | <b>Acetal Resin</b>                             | For combs.<br>Good wear resistance and low coefficient of friction.                                                                                                                                                                                                                                                                                                                                                              |
| POLYETHYLENE  |  | <b>High Density Polyethylene</b>                | For return rollers, product side guide and shoe guide.<br>High density polyethylene with low coefficient of friction and good wear resistance.                                                                                                                                                                                                                                                                                   |
|               |  |                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               |  |                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               |  | <b>UHMWPE</b>                                   | For wear strips.<br>Ultra high molecular weight polyethylene with reduced coefficient of friction and high wear resistance.                                                                                                                                                                                                                                                                                                      |
|               |  |                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               |  | <b>High performance Self-Lubricating UHMWPE</b> | For wear strips.<br>New ultimate Ultra High Molecular Weight Polyethylene (molecular density of 9.000.000 g/mol), developed and produced in-house by REGINA. Thanks to special lube additives compounded with the material, provides superior sliding performance and excellent wear resistance of chains and belts in most critical conveying applications characterized by high-speeds, dry running conditions, high abrasion. |
| POLYPROPYLENE |  | <b>Polypropylene</b>                            | For guide flanges.<br>Lightweight material that offers optimum chemical and high temperature resistance.                                                                                                                                                                                                                                                                                                                         |

# Applications

| <div> <div>CONVEYED PRODUCTS</div> <div> <b>FliteTop<sup>®</sup></b><br/>CHAINS </div> </div> |                                                         |                                                 | PRODUCTS                                                                                       |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------|
|                                                                                               |                                                         |                                                 | STEEL CHAINS                                                                                   |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         |                                                 | Carbon Steel  | Ferritic   | Austenitic  | PHD Series* | Rubberized Series  |
| FOOD / BEVERAGE / BOTTLING APPLICATIONS                                                       | CANS<br>(2-3 PIECES)                                    | Depalletizer                                    |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Inliner/combiner                                |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Mass conveyors                                  |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Accumulation tables                             |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Sterilizers / Rinsers<br>Elevators / Lowerators |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Infeed packaging machines                       |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaging machines                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaged products convey                        |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Inclined conveyors                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               | PET BOTTLES                                             | Inliner/combiner                                |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Mass conveyors                                  |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Accumulation tables                             |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Sterilizers / Rinsers<br>Elevators / Lowerators |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Infeed packaging machines                       |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaging machines                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaged products convey                        |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Inclined conveyors                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               | GLASS BOTTLES**                                         | Depalletizer                                    |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Inliner/combiner                                |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Mass conveyors                                  |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Accumulation tables                             |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Sterilizers / Rinsers<br>Elevators / Lowerators |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Infeed packaging machines                       |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaging machines                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Packaged products convey                        |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Inclined conveyors                              |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
| GLASS MFG.                                                                                    | GLASS BOTTLES                                           | Inliner/combiner                                |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Mass conveyors                                  |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Accumulation tables                             |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Palletizer                                      |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         | Omega / Blowing Machines                        |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               |                                                         |                                                 |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
| SPECIAL APPLICATIONS                                                                          | AUTOMOTIVE / MECHANICAL IND.                            | Conveyors lines                                 |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               | CHEMICAL, DETERGENTS, PHARMACEUTICAL AND COSMETICS IND. | Conveyors lines                                 |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |
|                                                                                               | DAIRY IND.                                              | Conveyors lines                                 |                                                                                                |                                                                                                                                                                               |                                                                                                |             |                                                                                                       |

\* PHD Series features PRIMA material plates and hardened martensitic stainless steel pins.

\*\* In case of returnable glass bottles, please contact REGINA Application Engineers.

| PRODUCTS                                                                                    |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|
| PLASTIC CHAINS                                                                              |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        | SPECIAL CHAINS                                                                      |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
| Acetal<br> |    |    | Abrasion<br>Resistant<br> | Poly<br>propylene<br> | HFX<br>Rubberized<br>Series                                                         | Two<br>Piece                                                                        | Gripper                                                                             | LBP                                                                                  | Biplanar |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |    |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |    |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |                                                                                     |                                                                                                            |                                                                                                        |    |    |                                                                                     |    |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |    |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |    |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|            |    |    |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|           |   |   |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |   |                                                                                      |          |                                                                                       |
|          |  |  |                                                                                                            |                                                                                                        |                                                                                     |  |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |  |                                                                                                            |                                                                                                        |  |  |                                                                                     |  |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |  |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |  |                                                                                      |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |  |                                                                                     |                                                                                      |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |  |                                                                                     |  |          |                                                                                       |
|          |  |                                                                                     |                                                                                                            |                                                                                                        |  |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |  |                                                                                     |                         |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |  |                                                                                     |                         |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |  |                                                                                     |                         |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |  |                                                                                     |                         |                                                                                                        |                                                                                     |                                                                                     |  |                                                                                      |          |                                                                                       |
|                                                                                             |  |                                                                                     |                         |                                                                                                        |                                                                                     |  |                                                                                     |                                                                                      |          |                                                                                       |
|          |                                                                                     |                                                                                     |                                                                                                            |                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |                                                                                       |
|                                                                                             |                                                                                     |                                                                                     |                                                                                                            |                                                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                      |          |  |

For more detailed information, contact REGINA Technical Department.

# Matveyor® ULTOP®

## CHAINS/ BELTS

CONVEYED  
PRODUCTS

### PRODUCTS

NANO-  
PITCH  
(8mm)

LIGHT DUTY  
SHORT PITCH  
(½")

LIGHT DUTY  
(1" PITCH)

8300

600  
610  
300  
500  
200

HF 510  
HFS 510  
HF 200

611  
RR611  
HF500

LBP610  
650M

1600

1500

1501

FOOD / BEVERAGE / BOTTLING APPLICATIONS

CANS  
(2-3 PIECES)

Depalletizer

Inliner/combiner

Mass conveyors

Accumulation tables

Warmer

Infeed packaging machines

Packaging machines

Packaged products convey

PET BOTTLES

Inliner/combiner

Mass conveyors

Accumulation tables

Warmer

Infeed packaging machines

Packaging machines

Packaged products convey

GLASS BOTTLES

Depalletizer

Inliner/combiner

Mass conveyors

Accumulation tables

Pasteurizer

Infeed packaging machines

Packaging machines

Packaged products convey

GLASS MFG.

GLASS BOTTLES

Inliner/combiner

Mass conveyors

Accumulation tables

Palletizer

SPECIAL  
APPLICATIONS

PHARMACEUTICAL  
DETERGENT  
COSMETICS  
CONTAINERS

Conveyors lines

BAKERY

Conveyors lines

PAPER/  
CARDBOARD

Conveyors lines

## PRODUCTS

[illegible]

For more detailed information, contact REGINA Technical Department.

## Straight Running Steel Chains

### 915 - Single Hinge, Reduced Plate Gap (1,6 mm)

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |      |   |    |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|------|---|----|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |      |   |    |
| 2 ¼   | 57,1  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |      | P |    |
| 2 ½   | 63,5  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |      | P |    |
| 2 ¾   | 66,7  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |      | P |    |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | S         | SS-4 | P | SS |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           | SS-4 | P |    |
| 3 ½   | 88,9  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |      | P |    |
| 4     | 101,6 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | S         |      | P | SS |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | S         | SS-4 | P | SS |
| 6     | 152,4 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | S         |      | P | SS |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | S         | SS-4 | P | SS |

### PHD 915 - Single Hinge, Reduced Plate Gap (1,6 mm), Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |  |   |  |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--|---|--|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |  |   |  |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |  | P |  |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |  | P |  |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |  | P |  |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 |           |  | P |  |

### 2815 - Double Hinge

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |      |   |    |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|------|---|----|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |      |   |    |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.071 | 1,8 | 3.150 | 80 | S         | SS-4 | P | SS |

### PHD 2815 - Double Hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |  |   |  |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--|---|--|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |  |   |  |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.071 | 1,8 | 3.150 | 80 |           |  | P |  |

### PHD 9157 - Heavy Duty Single Hinge, Reduced Plate Gap, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |  |   |  |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--|---|--|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |  |   |  |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 2.244 | 57 |           |  | P |  |

### 803 - Mini Hinge

| Width |      | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |  |   |  |
|-------|------|-------|------|-----------|----|-------|-----|-------|----|-----------|--|---|--|
| inch  | mm   | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     |  |   |  |
| 1 ¼   | 31,8 | 1 ½   | 38,1 | 0.118     | 3  | 0.110 | 2,8 | 0.866 | 22 |           |  | P |  |
| 1 ¾   | 44,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.110 | 2,8 | 0.866 | 22 |           |  | P |  |

## Sideflexing Steel Chains

### 881 - Bevel

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |    |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|----|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     |    |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | S         | SS |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | S         | SS |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | S         | SS |

### 981 - Bevel, Reduced Plate Gap

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         |

### 881T - TAB

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |    |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|----|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     |    |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | S         | SS |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | S         | SS |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | S         | SS |

### 981T - TAB, Reduced Plate Gap

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         |

### 981M - Magnetic, Reduced Plate Gap

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |   |
|-------|-------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|---|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     |   |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | SS-4      | P |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | SS-4      | P |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | SS-4      | P |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | SS-4      | P |

### PHD 981M - Magnetic, Reduced Plate Gap, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |
|-------|-------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | P         |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | P         |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | P         |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 19.685             | 500 | 1.654 | 42 | P         |

### PHD 9857M - Magnetic, Heavy Duty Single Hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |
|-------|-------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 29.528             | 750 | 2.244 | 57 | P         |



### 982T – TAB, Reduced Sideflexing Radius

| Width |      | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |
|-------|------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|
| inch  | mm   | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     |
| 3 ¼   | 82,6 | 1 ½   | 38,1 | 0.118     | 3  | 7.874              | 200 | 1.693 | 43 | SS        |

## FliteTop®

# Rubberized Surface Steel Chains

### PHDG 915 – Straight Running, Single Hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     | Rubber |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | P         | NBR    |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | P         | NBR    |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 1.654 | 42 | P         | NBR    |

### PHDG 2815 – Straight Running, Double hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     | Rubber |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.071 | 1,8 | 3.150 | 80 | P         | NBR    |

### PHDG 9157 – Straight Running, Heavy Duty Single Hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Gap   |     | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|-------|-----|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch  | mm  | inch  | mm | Plate     | Rubber |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 0.063 | 1,6 | 2.244 | 57 | P         | NBR    |

### PHDG 981T – Sideflexing TAB, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     | Rubber |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         | NBR    |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         | NBR    |

### PHDG 981M – Sideflexing Magnetic, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     | Rubber |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.118     | 3  | 18                 | 457,2 | 1.693 | 43 | P         | NBR    |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 24                 | 609,6 | 1.693 | 43 | P         | NBR    |


### PHDG 9857M – Sideflexing Magnetic, Heavy Duty Single Hinge, Heat Treated Pin

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |        |
|-------|-------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|--------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     | Rubber |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.118     | 3  | 29.528             | 750 | 2.244 | 57 | P         | NBR    |


## Straight Running Plastic Chains




| 820 – Single Hinge |       |       |      |           |    |                    |    |       |      |           |                                        |
|--------------------|-------|-------|------|-----------|----|--------------------|----|-------|------|-----------|----------------------------------------|
| Width              |       | Pitch |      | Thickness |    | Backflexing Radius |    | Hinge |      | Materials |                                        |
| inch               | mm    | inch  | mm   | inch      | mm | inch               | mm | inch  | mm   | Plate     |                                        |
| 3 ¼                | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> AR e-FAST <sup>2</sup> |
| 3.30               | 83,8  | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> e-FAST <sup>2</sup>    |
| 4                  | 101,6 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        |                                        |
| 4 ½                | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> AR e-FAST <sup>2</sup> |
| 6                  | 152,4 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        |                                        |
| 7.50               | 190,5 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup>                        |




| 828 – Reinforced Single Hinge, Reduced Plate Gap |       |       |      |           |    |                    |    |       |    |           |                                        |
|--------------------------------------------------|-------|-------|------|-----------|----|--------------------|----|-------|----|-----------|----------------------------------------|
| Width                                            |       | Pitch |      | Thickness |    | Backflexing Radius |    | Hinge |    | Materials |                                        |
| inch                                             | mm    | inch  | mm   | inch      | mm | inch               | mm | inch  | mm | Plate     |                                        |
| 3 ¼                                              | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.654 | 42 | UP        | DK <sup>2</sup> AR e-FAST <sup>2</sup> |
| 3.30                                             | 83,8  | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.654 | 42 | UP        | DK <sup>2</sup> e-FAST <sup>2</sup>    |
| 4 ½                                              | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.654 | 42 | UP        | DK <sup>2</sup> AR e-FAST <sup>2</sup> |



| 831 – Single Hinge, Reinforced Top Plate |       |       |      |           |     |                    |    |       |      |           |                 |
|------------------------------------------|-------|-------|------|-----------|-----|--------------------|----|-------|------|-----------|-----------------|
| Width                                    |       | Pitch |      | Thickness |     | Backflexing Radius |    | Hinge |      | Materials |                 |
| inch                                     | mm    | inch  | mm   | inch      | mm  | inch               | mm | inch  | mm   | Plate     |                 |
| 3 ¼                                      | 82,6  | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> |
| 3.30                                     | 83,8  | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> |
| 4 ½                                      | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> |
| 7.50                                     | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 1.638 | 41,6 | UP        | DK <sup>2</sup> |



| 821 – Double Hinge, Reinforced Top Plate |       |       |      |           |     |                    |    |       |       |           |                 |
|------------------------------------------|-------|-------|------|-----------|-----|--------------------|----|-------|-------|-----------|-----------------|
| Width                                    |       | Pitch |      | Thickness |     | Backflexing Radius |    | Hinge |       | Materials |                 |
| inch                                     | mm    | inch  | mm   | inch      | mm  | inch               | mm | inch  | mm    | Plate     |                 |
| 7 ½                                      | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        | DK <sup>2</sup> |
| 10                                       | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        |                 |
| 12                                       | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        |                 |



| 8257 – Heavy Duty Single Hinge, Reinforced Top Plate |       |       |      |           |     |                    |    |       |    |           |  |
|------------------------------------------------------|-------|-------|------|-----------|-----|--------------------|----|-------|----|-----------|--|
| Width                                                |       | Pitch |      | Thickness |     | Backflexing Radius |    | Hinge |    | Materials |  |
| inch                                                 | mm    | inch  | mm   | inch      | mm  | inch               | mm | inch  | mm | Plate     |  |
| 7 ½                                                  | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        |  |
| 10                                                   | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        |  |
| 12                                                   | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        |  |

## Sideflexing Plastic Chains



| 880 – Bevel |       |       |      |           |    |                    |       |       |    |           |    |
|-------------|-------|-------|------|-----------|----|--------------------|-------|-------|----|-----------|----|
| Width       |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |    | Materials |    |
| inch        | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm | Plate     |    |
| 3 ¼         | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 18                 | 457,2 | 1.693 | 43 | UP        | AR |
| 4 ½         | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500   | 1.693 | 43 | UP        | AR |



## 880T - TAB

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials |                 |    |                                |
|-------|-------|-------|------|-----------|----|--------------------|-------|-------|------|-----------|-----------------|----|--------------------------------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm   | Plate     |                 |    |                                |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 18                 | 457,2 | 1.689 | 42,9 | UP        | DK <sup>2</sup> | AR | <b>NEW</b> e-FAST <sup>2</sup> |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.157     | 4  | 18                 | 457,2 | 1.689 | 42,9 | UP        | DK <sup>2</sup> |    | e-FAST <sup>2</sup>            |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500   | 1.689 | 42,9 | UP        | DK <sup>2</sup> | AR | e-FAST <sup>2</sup>            |

## 880M RG - Magnetic, Reduced Plate Gap

| Width |       | Pitch |      | Thickness |    | Sideflexing Radius |     | Hinge |    | Materials |                 |    |                                |
|-------|-------|-------|------|-----------|----|--------------------|-----|-------|----|-----------|-----------------|----|--------------------------------|
| inch  | mm    | inch  | mm   | inch      | mm | inch               | mm  | inch  | mm | Plate     |                 |    |                                |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500 | 1.654 | 42 | UP        | DK <sup>2</sup> |    | <b>NEW</b> e-FAST <sup>2</sup> |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500 | 1.654 | 42 | UP        | DK <sup>2</sup> |    | e-FAST <sup>2</sup>            |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500 | 1.654 | 42 | UP        | DK <sup>2</sup> | AR | e-FAST <sup>2</sup>            |

## 879 - Bevel, Reinforced Top Plate

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.189     | 4,8 | 18                 | 457,2 | 1.693 | 43 | UP        |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 19.685             | 500   | 1.693 | 43 | UP        |

## 879T - TAB, Reinforced Top Plate

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |      | Materials |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------|------|-----------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm   | Plate     |
| 3 ¼   | 82,6  | 1 ½   | 38,1 | 0.189     | 4,8 | 18                 | 457,2 | 1.689 | 42,9 | UP        |
| 3.30  | 83,8  | 1 ½   | 38,1 | 0.189     | 4,8 | 18                 | 457,2 | 1.689 | 42,9 | UP        |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 19.685             | 500   | 1.689 | 42,9 | UP        |

## 882 - Bevel, Heavy Duty Single Hinge, Reinforced Top plate

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.402 | 61 | UP        |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.402 | 61 | UP        |
| 10    | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.402 | 61 | UP        |
| 12    | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.402 | 61 | UP        |

## 882T - TAB, Heavy Duty Single Hinge, Reinforced Top plate


| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |                 |  |                                |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|-----------------|--|--------------------------------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     |                 |  |                                |
| 4 ½   | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | DK <sup>2</sup> |  | <b>NEW</b> e-FAST <sup>2</sup> |
| 6     | 152,4 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | DK <sup>2</sup> |  |                                |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | DK <sup>2</sup> |  |                                |
| 10    | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        |                 |  |                                |
| 12    | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        |                 |  |                                |

## 882M - Magnetic, Heavy Duty Single Hinge, Reinforced Top Plate

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     |
| 7 ½   | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        |
| 10    | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        |
| 12    | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        |

## 878T - TAB, Reinforced Top Plate, Reduced Sideflexing Radius


| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials |                 |    |  |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------|------|-----------|-----------------|----|--|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Plate     |                 |    |  |
| 3 ¼   | 82,6 | 1 ½   | 38,1 | 0.189     | 4,8 | 7.874              | 200 | 1.689 | 42,9 | UP        | DK <sup>2</sup> | AR |  |



| 880TA – TAB, Vacuum Series |      |       |      |           |    |                    |       |       |      |           |  |
|----------------------------|------|-------|------|-----------|----|--------------------|-------|-------|------|-----------|--|
| Width                      |      | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials |  |
| inch                       | mm   | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm   | Plate     |  |
| 3 ¼                        | 82,6 | 1 ½   | 38,1 | 0.157     | 4  | 18                 | 457,2 | 1.689 | 42,9 | UP        |  |

# *FliteTop*®


## Rubberized Surface Plastic Chains



| HFX 820 – Straight Running, Single Hinge |       |       |      |           |    |                    |    |       |      |           |        |
|------------------------------------------|-------|-------|------|-----------|----|--------------------|----|-------|------|-----------|--------|
| Width                                    |       | Pitch |      | Thickness |    | Backflexing Radius |    | Hinge |      | Materials |        |
| inch                                     | mm    | inch  | mm   | inch      | mm | inch               | mm | inch  | mm   | Plate     | Rubber |
| 3 ¼                                      | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | TPE    |
| 4                                        | 101,6 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | TPE    |
| 4 ½                                      | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | TPE    |
| 6                                        | 152,4 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | TPE    |
| 7 ½                                      | 190,5 | 1 ½   | 38,1 | 0.157     | 4  | 1.575              | 40 | 1.638 | 41,6 | UP        | TPE    |




| HFX 821 – Straight Running, Double Hinge |       |       |      |           |     |                    |    |       |       |           |        |
|------------------------------------------|-------|-------|------|-----------|-----|--------------------|----|-------|-------|-----------|--------|
| Width                                    |       | Pitch |      | Thickness |     | Backflexing Radius |    | Hinge |       | Materials |        |
| inch                                     | mm    | inch  | mm   | inch      | mm  | inch               | mm | inch  | mm    | Plate     | Rubber |
| 7 ½                                      | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        | TPE    |
| 10                                       | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        | TPE    |
| 12                                       | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 5.374 | 136,5 | UP        | TPE    |




| HFX 8257 – Straight Running, Heavy Duty Single Hinge |       |       |      |           |     |                    |    |       |    |           |        |
|------------------------------------------------------|-------|-------|------|-----------|-----|--------------------|----|-------|----|-----------|--------|
| Width                                                |       | Pitch |      | Thickness |     | Backflexing Radius |    | Hinge |    | Materials |        |
| inch                                                 | mm    | inch  | mm   | inch      | mm  | inch               | mm | inch  | mm | Plate     | Rubber |
| 7 ½                                                  | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        | TPE    |
| 10                                                   | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        | TPE    |
| 12                                                   | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 1.575              | 40 | 2.244 | 57 | UP        | TPE    |



| HFX 880T – Sideflexing TAB |       |       |      |           |    |                    |       |       |      |           |        |
|----------------------------|-------|-------|------|-----------|----|--------------------|-------|-------|------|-----------|--------|
| Width                      |       | Pitch |      | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials |        |
| inch                       | mm    | inch  | mm   | inch      | mm | inch               | mm    | inch  | mm   | Plate     | Rubber |
| 3 ¼                        | 82,6  | 1 ½   | 38,1 | 0.157     | 4  | 18                 | 457,2 | 1.689 | 42,9 | UP        | TPE    |
| 4 ½                        | 114,3 | 1 ½   | 38,1 | 0.157     | 4  | 19.685             | 500   | 1.689 | 42,9 | UP        | TPE    |



| HFX 882T – Sideflexing TAB, Heavy Duty Single Hinge |       |       |      |           |     |                    |       |       |    |           |        |
|-----------------------------------------------------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|--------|
| Width                                               |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |        |
| inch                                                | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     | Rubber |
| 4 ½                                                 | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |
| 7 ½                                                 | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |
| 10                                                  | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |
| 12                                                  | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |



| HFX 882M – Sideflexing Magnetic, Heavy Duty Single Hinge |       |       |      |           |     |                    |       |       |    |           |        |
|----------------------------------------------------------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|--------|
| Width                                                    |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |        |
| inch                                                     | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     | Rubber |
| 7 ½                                                      | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |
| 10                                                       | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |
| 12                                                       | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | TPE    |




## HFX 1873T – Two-piece, Sideflexing TAB, ¾" Pitch

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |     |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|-----|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |     |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | SS     | UP     | TPE |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | SS     | UP     | TPE |
| 6     | 152,4 | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP     | TPE |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP     | TPE |
| 10    | 254   | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP     | TPE |
| 12    | 304,8 | ¾     | 19,05 | 0.157     | 4  | 24                 | 609,6 | 1.264 | 32,1 | S          | SS     | UP     | TPE |


# FliteTop®

## Two-Piece Chains




## 1864 – Straight Running, Steel Flights, ¾" Pitch

| Width |       | Pitch |       | Thickness |    | Gap   |     | Hinge |    | Materials  |        |   |    |
|-------|-------|-------|-------|-----------|----|-------|-----|-------|----|------------|--------|---|----|
| inch  | mm    | inch  | mm    | inch      | mm | inch  | mm  | inch  | mm | Base chain | Flight |   |    |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.118     | 3  | 0.126 | 3,2 | 1.063 | 27 | S          | SS     | S | SS |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.118     | 3  | 0.126 | 3,2 | 1.063 | 27 | S          | SS     | S | SS |
| 6     | 152,4 | ¾     | 19,05 | 0.118     | 3  | 0.126 | 3,2 | 1.063 | 27 | S          | SS     | S | SS |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.118     | 3  | 0.126 | 3,2 | 1.063 | 27 | S          | SS     | S | SS |



## 1874T – Sideflexing TAB, Steel Flights, ¾" Pitch, Flight Gap 8,2 mm

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |   |    |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|---|----|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight |   |    |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.118     | 3  | 15                 | 381   | 1.252 | 31,8 | S          | SS     | S | SS |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.118     | 3  | 15                 | 381   | 1.252 | 31,8 | S          | SS     | S | SS |
| 6     | 152,4 | ¾     | 19,05 | 0.118     | 3  | 18                 | 457,2 | 1.252 | 31,8 | S          | SS     | S | SS |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.118     | 3  | 24                 | 609,6 | 1.252 | 31,8 | S          | SS     | S | SS |



## 1874TM – Sideflexing Tab, Steel Flights, ¾" Pitch, Reduced Flight Gap 5,7 mm

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |     | Hinge |      | Materials  |        |   |    |
|-------|-------|-------|-------|-----------|----|--------------------|-----|-------|------|------------|--------|---|----|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm  | inch  | mm   | Base chain | Flight |   |    |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.118     | 3  | 15                 | 381 | 1.252 | 31,8 | S          | SS     | S | SS |



## 843 – Straight Running, Plastic Flights, ½" Pitch

| Width |      | Pitch |      | Thickness |     | Hinge |      | Materials  |        |    |  |
|-------|------|-------|------|-----------|-----|-------|------|------------|--------|----|--|
| inch  | mm   | inch  | mm   | inch      | mm  | inch  | mm   | Base chain | Flight |    |  |
| 1 ¾   | 34,9 | ½     | 12,7 | 0.126     | 3,2 | 0.811 | 20,6 | S          | SS     | UP |  |
| 2     | 50,8 | ½     | 12,7 | 0.126     | 3,2 | 0.811 | 20,6 | S          | SS     | UP |  |
| 3 ¼   | 82,6 | ½     | 12,7 | 0.126     | 3,2 | 0.811 | 20,6 | S          | SS     | UP |  |




## 845 – Straight Running, Plastic Flights, ½" Pitch, Bidirectional

| Width |      | Pitch |      | Thickness |     | Gap   |     | Hinge |      | Materials  |        |    |  |
|-------|------|-------|------|-----------|-----|-------|-----|-------|------|------------|--------|----|--|
| inch  | mm   | inch  | mm   | inch      | mm  | inch  | mm  | inch  | mm   | Base chain | Flight |    |  |
| 1 ¾   | 34,9 | ½     | 12,7 | 0.126     | 3,2 | 0.008 | 0,2 | 0.811 | 20,6 | S          | SS     | UP |  |
| 1.57  | 40   | ½     | 12,7 | 0.126     | 3,2 | 0.008 | 0,2 | 0.811 | 20,6 | S          | SS     | UP |  |
| 2     | 50,8 | ½     | 12,7 | 0.126     | 3,2 | 0.008 | 0,2 | 0.811 | 20,6 | S          | SS     | UP |  |



## RR 845 – Straight Running, Plastic Flights, ½" Pitch, Bidirectional, Raised Rib

| Width |      | Pitch |      | Thickness |      | Gap   |     | Hinge |      | Materials  |        |  |  |
|-------|------|-------|------|-----------|------|-------|-----|-------|------|------------|--------|--|--|
| inch  | mm   | inch  | mm   | inch      | mm   | inch  | mm  | inch  | mm   | Base chain | Flight |  |  |
| 1.57  | 40   | ½     | 12,7 | 0.480     | 12,2 | 0.008 | 0,2 | 0.811 | 20,6 | S+NC       | UP     |  |  |
| 2.11  | 53,6 | ½     | 12,7 | 0.480     | 12,2 | 0.008 | 0,2 | 0.811 | 20,6 | S+NC       | UP     |  |  |



## HF RR 845 – Straight Running, Plastic Flights, ½" Pitch, Bidirectional, Rubberized Raised Rib

| Width |      | Pitch |      | Thickness |      | Gap   |     | Hinge |      | Materials  |        |        |
|-------|------|-------|------|-----------|------|-------|-----|-------|------|------------|--------|--------|
| inch  | mm   | inch  | mm   | inch      | mm   | inch  | mm  | inch  | mm   | Base chain | Flight | Rubber |
| 1.52  | 38,5 | ½     | 12,7 | 0.496     | 12,6 | 0.016 | 0,4 | 0.811 | 20,6 | S+NC       | PP     | TPE    |
| 2.19  | 55,5 | ½     | 12,7 | 0.496     | 12,6 | 0.016 | 0,4 | 0.811 | 20,6 | S+NC       | PP     | TPE    |



## 863 – Straight Running, Plastic Flights, ¾" Pitch

| Width |       | Pitch |       | Thickness |    | Hinge |    | Materials  |        |    |
|-------|-------|-------|-------|-----------|----|-------|----|------------|--------|----|
| inch  | mm    | inch  | mm    | inch      | mm | inch  | mm | Base chain | Flight |    |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.157     | 4  | 1.343 | 34 | S          | SS     | UP |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.157     | 4  | 1.343 | 34 | S          | SS     | UP |
| 6     | 152,4 | ¾     | 19,05 | 0.157     | 4  | 1.343 | 34 | S          | SS     | UP |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.157     | 4  | 1.343 | 34 | S          | SS     | UP |




## 1843T – Sideflexing TAB, Plastic Flights, ½" Pitch

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |    | Materials  |        |       |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------|----|------------|--------|-------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm | Base chain | Flight |       |
| 1 ¼   | 31,8 | 1 ½   | 12,7 | 0.126     | 3,2 | 10                 | 254 | 0.787 | 20 | S          | SS     | UP AR |



## 1873T – Sideflexing TAB, Plastic Flights, ¾" Pitch

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |    |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|----|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight |    |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | SS     | UP |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | SS     | UP |
| 6     | 152,4 | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP |
| 10    | 254   | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP |
| 12    | 304,8 | ¾     | 19,05 | 0.157     | 4  | 24                 | 690,6 | 1.264 | 32,1 | S          | SS     | UP |



## 1863T – Sideflexing TAB, Plastic Flights, ¾" Pitch, Reduced Flight Gap

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |       |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|-------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight |       |
| 2 ¼   | 57,1  | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP    |
| 3 ¼   | 82,6  | ¾     | 19,05 | 0.157     | 4  | 15.75              | 400,0 | 1.264 | 32,1 | S          | SS     | UP AR |
| 4 ½   | 114,3 | ¾     | 19,05 | 0.157     | 4  | 18                 | 457,2 | 1.264 | 32,1 | S          | SS     | UP AR |
| 7 ½   | 190,5 | ¾     | 19,05 | 0.157     | 4  | 18                 | 609,6 | 1.264 | 32,1 | S          | SS     | UP    |
| 12    | 304,8 | ¾     | 19,05 | 0.157     | 4  | 18                 | 609,6 | 1.264 | 32,1 | S          | SS     | UP    |
| 16    | 406,4 | ¾     | 19,05 | 0.157     | 4  | 29.528             | 750   | 1.264 | 32,1 | S          | SS     | UP    |



## 1883 – Spiral Chain, 1" Pitch, Integrated Bearings

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials  |        |  |
|-------|-------|-------|------|-----------|-----|--------------------|-----|-------|------|------------|--------|--|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Base chain | Flight |  |
| 18    | 457,2 | 1     | 25,4 | 0.189     | 4,8 | 25.59              | 650 | 1.626 | 41,3 | S          | UP     |  |



## HFX 1883 – Spiral Chain, 1" Pitch, Integrated Bearings, Rubberized Flights

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials  |        |        |
|-------|-------|-------|------|-----------|-----|--------------------|-----|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Base chain | Flight | Rubber |
| 18    | 457,2 | 1     | 25,4 | 0.189     | 4,8 | 25.59              | 650 | 1.626 | 41,3 | S          | UP     | TPE    |

# FliteTop®

## Gripper Chains



### GV 1874T – Two-Piece Gripper Chains, 3/4" Pitch, Steel Flights, Short Fingers

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |     | Hinge |      | Materials  |        |        |
|-------|-------|-------|-------|-----------|----|--------------------|-----|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm  | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6  | 3/4   | 19,05 | 0.118     | 3  | 15                 | 381 | 1.252 | 31,8 | S          | SS     | EPDM   |
| 4 1/2 | 114,3 | 3/4   | 19,05 | 0.118     | 3  | 15                 | 381 | 1.252 | 31,8 | S          | SS     | EPDM   |



### EV 1874T – Two-Piece Gripper Chains, 3/4" Pitch, Steel Flights, Long Fingers

| Width |      | Pitch |       | Thickness |    | Sideflexing Radius |     | Hinge |      | Materials  |        |        |
|-------|------|-------|-------|-----------|----|--------------------|-----|-------|------|------------|--------|--------|
| inch  | mm   | inch  | mm    | inch      | mm | inch               | mm  | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6 | 3/4   | 19,05 | 0.118     | 3  | 15                 | 381 | 1.252 | 31,8 | S          | SS     | EPDM   |



### GW 1873T – Two-Piece Gripper Chains, 3/4" Pitch, Plastic Flights, Short Fingers

| Width |      | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |
|-------|------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|
| inch  | mm   | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6 | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |



### EW 1873T – Two-Piece Gripper Chains, 3/4" Pitch, Plastic Flights, Long Fingers

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6  | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |
| 4 1/2 | 114,3 | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |



### GD 1873T – Two-Piece Gripper Chain, 3/4" Pitch, Plastic Flights, D-Shape

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6  | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |
| 7 1/2 | 190,5 | 3/4   | 19,05 | 0.157     | 4  | 24                 | 609,6 | 1.264 | 32,1 | SS         | UP     | TPE    |



NEW

### GS 1873T – Two-Piece Gripper Chain, 3/4" Pitch, Plastic Flights, Special D-Shape


| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |
| 3 1/4 | 82,6  | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |
| 4 1/2 | 114,3 | 3/4   | 19,05 | 0.157     | 4  | 14                 | 355,6 | 1.264 | 32,1 | S          | BS     | TPE    |

NEW



### GC 1873T – Two-Piece Gripper Chains, 3/4" Pitch, Plastic Flights, "House"-Shape

| Width |       | Pitch |       | Thickness |    | Sideflexing Radius |       | Hinge |      | Materials  |        |        |
|-------|-------|-------|-------|-----------|----|--------------------|-------|-------|------|------------|--------|--------|
| inch  | mm    | inch  | mm    | inch      | mm | inch               | mm    | inch  | mm   | Base chain | Flight | Rubber |
| 8     | 203,2 | 3/4   | 19,05 | 0.157     | 4  | 24                 | 609,6 | 1.264 | 32,1 | SS         | UP     | TPE    |




### EW 1843T – Two-Piece Gripper Chains, 1/2" Pitch, Plastic Flights, Long Fingers

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials  |        |        |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------|------|------------|--------|--------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Base chain | Flight | Rubber |
| 1 1/2 | 38,1 | 1/2   | 12,7 | 0.130     | 3,2 | 10                 | 254 | 1.264 | 32,1 | S          | SS     | TPE    |



| GW 878T – One-Piece Gripper Chains, Plastic Plates, Short Fingers |      |       |      |           |     |                    |     |       |      |           |        |
|-------------------------------------------------------------------|------|-------|------|-----------|-----|--------------------|-----|-------|------|-----------|--------|
| Width                                                             |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials |        |
| inch                                                              | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Flight    | Rubber |
| 3 ¼                                                               | 82,6 | 1 ½   | 38,1 | 0.189     | 4,8 | 9.843              | 250 | 1.689 | 42,9 | UP        | TPE    |



| EW 878T – One-Piece Gripper Chains, Plastic Plates, Long Fingers |      |       |      |           |     |                    |     |       |      |           |        |
|------------------------------------------------------------------|------|-------|------|-----------|-----|--------------------|-----|-------|------|-----------|--------|
| Width                                                            |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials |        |
| inch                                                             | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Flight    | Rubber |
| 3 ¼                                                              | 82,6 | 1 ½   | 38,1 | 0.189     | 4,8 | 9.843              | 250 | 1.689 | 42,9 | UP        | TPE    |



| GD 878T – One-Piece Gripper Chains, Plastic Plates, D-Shape |      |       |      |           |     |                    |     |       |      |           |        |
|-------------------------------------------------------------|------|-------|------|-----------|-----|--------------------|-----|-------|------|-----------|--------|
| Width                                                       |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Hinge |      | Materials |        |
| inch                                                        | mm   | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm   | Flight    | Rubber |
| 3 ¼                                                         | 82,6 | 1 ½   | 38,1 | 0.189     | 4,8 | 9.843              | 250 | 1.689 | 42,9 | UP        | TPE    |

## FliteTop®

# LBP Chains (Low Back-Line Pressure)



| LBP 821 – Straight Running, Double Hinge |       |       |      |           |     |                    |     |       |       |           |        |
|------------------------------------------|-------|-------|------|-----------|-----|--------------------|-----|-------|-------|-----------|--------|
| Width                                    |       | Pitch |      | Thickness |     | Backflexing Radius |     | Hinge |       | Materials |        |
| inch                                     | mm    | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm    | Plate     | Roller |
| 7 ½                                      | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 9.055              | 230 | 5.374 | 136,5 | UP        | UP     |
| 10                                       | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 9.055              | 230 | 5.374 | 136,5 | UP        | UP     |
| 12                                       | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 9.055              | 230 | 5.374 | 136,5 | UP        | UP     |



| LBP 8257 – Straight Running, Heavy Duty Single Hinge |       |       |      |           |     |                    |     |       |    |           |        |
|------------------------------------------------------|-------|-------|------|-----------|-----|--------------------|-----|-------|----|-----------|--------|
| Width                                                |       | Pitch |      | Thickness |     | Backflexing Radius |     | Hinge |    | Materials |        |
| inch                                                 | mm    | inch  | mm   | inch      | mm  | inch               | mm  | inch  | mm | Plate     | Roller |
| 7 ½                                                  | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 11.811             | 300 | 2.244 | 57 | UP        | UP     |
| 10                                                   | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 11.811             | 300 | 2.244 | 57 | UP        | UP     |
| 12                                                   | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 11.811             | 300 | 2.244 | 57 | UP        | UP     |



| LBP 882T – Sideflexing TAB, Heavy Duty Single Hinge |       |       |      |           |     |                    |       |       |    |           |        |
|-----------------------------------------------------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|--------|
| Width                                               |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |        |
| inch                                                | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     | Roller |
| 3 ¾                                                 | 95,3  | 1 ½   | 38,1 | 0.189     | 4,8 | 26.260             | 667   | 2.244 | 57 | UP        | UP     |
| 4 ½                                                 | 114,3 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |
| 7 ½                                                 | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |
| 10                                                  | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |
| 12                                                  | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |



| <b>LBP 882M – Sideflexing Magnetic, Heavy Duty Single Hinge</b> |       |       |      |           |     |                    |       |       |    |           |        |
|-----------------------------------------------------------------|-------|-------|------|-----------|-----|--------------------|-------|-------|----|-----------|--------|
| Width                                                           |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Hinge |    | Materials |        |
| inch                                                            | mm    | inch  | mm   | inch      | mm  | inch               | mm    | inch  | mm | Plate     | Roller |
| 7 ½                                                             | 190,5 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |
| 10                                                              | 254   | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |
| 12                                                              | 304,8 | 1 ½   | 38,1 | 0.189     | 4,8 | 24                 | 609,6 | 2.244 | 57 | UP        | UP     |

# **FliteTop®** Biplanar Chains



| <b>1700 – Sideflexing, Increased Product Support Surface</b> |    |       |    |           |    |                    |     |                    |    |           |    |
|--------------------------------------------------------------|----|-------|----|-----------|----|--------------------|-----|--------------------|----|-----------|----|
| Width                                                        |    | Pitch |    | Thickness |    | Sideflexing Radius |     | Backflexing Radius |    | Materials |    |
| inch                                                         | mm | inch  | mm | inch      | mm | inch               | mm  | inch               | mm | Link      |    |
| 2.17                                                         | 55 | 1.97  | 50 | 0.157     | 4  | 5.512              | 140 | 1.969              | 50 | UP        | WA |




| <b>1702 – Sideflexing</b> |    |       |    |           |    |                    |     |                    |    |           |  |
|---------------------------|----|-------|----|-----------|----|--------------------|-----|--------------------|----|-----------|--|
| Width                     |    | Pitch |    | Thickness |    | Sideflexing Radius |     | Backflexing Radius |    | Materials |  |
| inch                      | mm | inch  | mm | inch      | mm | inch               | mm  | inch               | mm | Link      |  |
| 2.09                      | 53 | 1.97  | 50 | 0.197     | 5  | 5.512              | 140 | 1.969              | 50 | WA        |  |



| <b>1701T – Sideflexing TAB</b> |    |       |    |           |    |                    |     |                    |    |           |    |
|--------------------------------|----|-------|----|-----------|----|--------------------|-----|--------------------|----|-----------|----|
| Width                          |    | Pitch |    | Thickness |    | Sideflexing Radius |     | Backflexing Radius |    | Materials |    |
| inch                           | mm | inch  | mm | inch      | mm | inch               | mm  | inch               | mm | Link      |    |
| 2.09                           | 53 | 1.97  | 50 | 0.197     | 5  | 5.512              | 140 | 1.969              | 50 | UP        | WA |

# Matveyor®


## 8 mm Nanopitch Belt




| 8300 – Modular Belts, Imperial Standard, Solid Top |    |       |    |           |      |                        |               |             |                                                                                                |
|----------------------------------------------------|----|-------|----|-----------|------|------------------------|---------------|-------------|------------------------------------------------------------------------------------------------|
| Width                                              |    | Pitch |    | Thickness |      | Tracking Guide Version |               | Top Surface | Materials                                                                                      |
| inch                                               | mm | inch  | mm | inch      | mm   | Without                | With          |             | Module                                                                                         |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments  |    | 0.315 | 8  | 0.242     | 6,15 | Available              | Not Available | Solid       |  <b>NEW</b> |

# Matveyor®

## 1/2" Pitch Belts and Chains




| 600 – Modular Belts and Dedicated Widths, Metric Standard, Solid Top, Flat Bottom Surface |    |       |      |           |     |                        |           |             |                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Width                                                                                     |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                                                                                                                                                                                |
| inch                                                                                      | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module                                                                                                                                                                                   |
| 3.35                                                                                      | 85 | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP  PP  <b>NEW</b> |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                                       |    | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP  PP             |




| 600G ATM – Active Transfer Modules, Metric Standard, Solid Top |       |     |       |      |           |     |                        |           |                                                                                                |
|----------------------------------------------------------------|-------|-----|-------|------|-----------|-----|------------------------|-----------|------------------------------------------------------------------------------------------------|
|                                                                | Width |     | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface                                                                                    |
|                                                                | inch  | mm  | inch  | mm   | inch      | mm  | Without                | With      | Materials                                                                                      |
| Left version                                                   | 4.33  | 110 | 1/2   | 12,7 | 0.343     | 8,7 | Not Available          | Available | Solid UP  |
| Right version                                                  | 4.33  | 110 | 1/2   | 12,7 | 0.343     | 8,7 | Not Available          | Available | Solid UP  |




| 610 – Modular Belts and Dedicated Widths, Metric Standard, Solid Top, Round Bottom Surface |    |       |      |           |     |                        |           |             |                                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Width                                                                                      |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                                                                                                                                                                                    |
| inch                                                                                       | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module                                                                                                                                                                                       |
| 3.35                                                                                       | 85 | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP  PP  <b>NEW</b> |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                                        |    | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP  PP             |



| 500 – Modular Belts and Dedicated Widths, Metric Standard, Flush Grid |    |       |      |           |     |                        |           |             |           |
|-----------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|
| Width                                                                 |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |
| inch                                                                  | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |
| 3.35                                                                  | 85 | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Flush Grid  | UP PP     |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                   |    | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Flush Grid  | UP PP     |



| HF 510 – Modular Belts and Dedicated Widths, Metric Standard, Rubberized Surface, Full Cover |    |       |      |           |     |                        |           |             |                                                                                                  |
|----------------------------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|--------------------------------------------------------------------------------------------------|
| Width                                                                                        |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                                                                                        |
| inch                                                                                         | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module Rubber                                                                                    |
| 3.35                                                                                         | 85 | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF PP  TPE |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                                          |    | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF PP  TPE |




| HFS 510 – Modular Belts and Dedicated Widths, Metric Standard, Rubberized Surface, Side Indent |    |       |      |           |     |                        |           |             |                                                                                                  |
|------------------------------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|--------------------------------------------------------------------------------------------------|
| Width                                                                                          |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                                                                                        |
| inch                                                                                           | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module Rubber                                                                                    |
| 10.04" (255 mm) or wider in 3.35" (85 mm) increments                                           |    | 1/2   | 12,7 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF PP  TPE |



| LBP 610 – Modular Belts and Dedicated Widths, Metric Standard, LBP Rollers |    |       |      |           |     |                        |           |             |           |        |
|----------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|--------|
| Width                                                                      |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |        |
| inch                                                                       | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module    | Roller |
| 3.35                                                                       | 85 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Rollers     | UP        | UP     |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                        |    | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Rollers     | UP        | UP     |



| 300 – Modular Belts and Dedicated Widths, Imperial Standard, Solid Top |       |       |      |           |     |                        |               |             |           |                                                               |
|------------------------------------------------------------------------|-------|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|---------------------------------------------------------------|
| Width                                                                  |       | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |                                                               |
| inch                                                                   | mm    | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |                                                               |
| 3                                                                      | 76,2  | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> PP <b>e-FAST<sup>2</sup></b> <span>NEW</span> |
| 4 ½                                                                    | 114,3 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> PP                                            |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments                      |       | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> PP <b>e-FAST<sup>2</sup></b>                  |



| 300G ATM – Active Transfer Modules, Imperial Standard, Solid Top |       |     |       |      |           |     |                        |           |             |                    |
|------------------------------------------------------------------|-------|-----|-------|------|-----------|-----|------------------------|-----------|-------------|--------------------|
|                                                                  | Width |     | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials          |
|                                                                  | inch  | mm  | inch  | mm   | inch      | mm  | Without                | With      |             | Module             |
| Left version                                                     | 6.30  | 160 | ½     | 12,7 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> |
| Right version                                                    | 6.30  | 160 | ½     | 12,7 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> |



| 200 – Modular Belts and Dedicated Widths, Imperial Standard, Flush Grid |      |       |      |           |     |                        |               |             |           |    |
|-------------------------------------------------------------------------|------|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|----|
| Width                                                                   |      | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |    |
| inch                                                                    | mm   | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |    |
| 3                                                                       | 76,2 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Flush grid  | UP        | PP |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments                       |      | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Flush grid  | UP        | PP |



| HF 200 – Modular Belts and Dedicated Widths, Imperial Standard, Rubberized Surface, Full Cover |      |       |      |           |     |                        |               |             |           |    |        |     |
|------------------------------------------------------------------------------------------------|------|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|----|--------|-----|
| Width                                                                                          |      | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |    |        |     |
| inch                                                                                           | mm   | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |    | Rubber |     |
| 3                                                                                              | 76,2 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Rubber      | ULF       | PP | TPE    | TPE |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments                                              |      | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Rubber      | ULF       | PP | TPE    | TPE |



| 611 – Narrow Chains, Solid Top |    |       |      |           |     |                        |           |             |           |
|--------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|
| Width                          |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |
| inch                           | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |
| 1.14                           | 29 | ½     | 12,7 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        |
| 1.34                           | 34 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP        |
| 1.46                           | 37 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP        |
| 2.01                           | 51 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP        |
| 2.99                           | 76 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available | Solid       | UP        |



| RR 611 – Narrow Chains, Raised Rib |    |       |      |           |     |                        |               |             |           |
|------------------------------------|----|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|
| Width                              |    | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |
| inch                               | mm | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |
| 1.14                               | 29 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        |
| 1.46                               | 37 | ½     | 12,7 | 0.343     | 8,7 | Available              | Available     | Raised Rib  | UP        |
| 1.81                               | 46 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        |
| 2.17                               | 55 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        |
| 2.99                               | 76 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        |



| HF 500 – Narrow Chain, Rubberized Surface |    |       |      |           |     |                        |               |             |           |        |
|-------------------------------------------|----|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|--------|
| Width                                     |    | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |        |
| inch                                      | mm | inch  | mm   | inch      | mm  | Without                | With          |             | Module    | Rubber |
| 2                                         | 51 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Rubber      | PP        | TPE    |

NEW

| 650M – Sideflexing Magnetic Chain, Solid Top |       |       |      |           |     |                        |               |             |           |                                     |
|----------------------------------------------|-------|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|-------------------------------------|
| Width                                        |       | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |                                     |
| inch                                         | mm    | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |                                     |
| 3.30                                         | 83,8  | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 4 ½                                          | 114,3 | ½     | 12,7 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |

NEW

NEW

# Matveyor®

## 1" Pitch Light Duty Belts and Chains



| 1600 – Modular Belts and Dedicated Widths, Metric Standard, Solid Top |      |       |      |           |     |                        |           |             |           |                                     |
|-----------------------------------------------------------------------|------|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|-------------------------------------|
| Width                                                                 |      | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |                                     |
| inch                                                                  | mm   | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |                                     |
| 3.30                                                                  | 83,8 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 3.35                                                                  | 85   | 1     | 25,4 | 0.343     | 8,7 | Available              | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                   |      | 1     | 25,4 | 0.343     | 8,7 | Available              | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |

NEW



| 1600G ATM – Active Transfer Modules, Metric Standard, Solid Top |       |     |       |      |           |     |                        |           |             |                                        |
|-----------------------------------------------------------------|-------|-----|-------|------|-----------|-----|------------------------|-----------|-------------|----------------------------------------|
|                                                                 | Width |     | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                              |
|                                                                 | inch  | mm  | inch  | mm   | inch      | mm  | Without                | With      |             | Module                                 |
| Left version                                                    | 4.33  | 110 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> e-FAST <sup>2</sup> |
| Right version                                                   | 4.33  | 110 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> e-FAST <sup>2</sup> |
| Right version                                                   | 7.68  | 195 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> e-FAST <sup>2</sup> |

NEW



| 1501 – Dedicated Widths, Metric Standard, Flush Grid |      |       |      |           |     |                        |           |             |           |                                     |
|------------------------------------------------------|------|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|-------------------------------------|
| Width                                                |      | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |                                     |
| inch                                                 | mm   | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |                                     |
| 3.30                                                 | 83,8 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Flush Grid  | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 3.35                                                 | 85   | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Flush Grid  | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |

NEW



| 1500 – Modular Belts and Dedicated Widths, Metric Standard, Flush Grid |    |       |      |           |     |                        |               |             |           |                                        |
|------------------------------------------------------------------------|----|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|----------------------------------------|
| Width                                                                  |    | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |                                        |
| inch                                                                   | mm | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |                                        |
| 3.35                                                                   | 85 | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Flush Grid  | UP        | DK <sup>2</sup> PP e-FAST <sup>2</sup> |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                    |    | 1     | 25,4 | 0.343     | 8,7 | Available              | Available     | Flush Grid  | UP        | DK <sup>2</sup> PP e-FAST <sup>2</sup> |

NEW



| 1500G ATM – Active Transfer Modules, Metric Standard, Flush Grid |       |     |       |      |           |     |                        |           |             |                                        |
|------------------------------------------------------------------|-------|-----|-------|------|-----------|-----|------------------------|-----------|-------------|----------------------------------------|
|                                                                  | Width |     | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials                              |
|                                                                  | inch  | mm  | inch  | mm   | inch      | mm  | Without                | With      |             | Module                                 |
| Right version                                                    | 7.68  | 195 | 1     | 25,4 | 0.343     | 8,7 | Not Available          | Available | Flush Grid  | UP DK <sup>2</sup> e-FAST <sup>2</sup> |

NEW



### RR 1500 – Modular Belts, Metric Standard, Raised Rib

| Width                                               |    | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |
|-----------------------------------------------------|----|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|
| inch                                                | mm | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments |    | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        |



### HF 1600 – Modular Belts and Dedicated Widths, Metric Standard, Rubberized Surface, Full Cover

| Width                                               |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |    |        |     |
|-----------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|----|--------|-----|
| inch                                                | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |    | Rubber |     |
| 3.35                                                | 85 | 1     | 25,4 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments |    | 1     | 25,4 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |



### HFS 1600 – Modular Belts, Metric Standard, Rubberized Surface, Side Indent

| Width                                                |    | Pitch |      | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |    |        |     |
|------------------------------------------------------|----|-------|------|-----------|-----|------------------------|-----------|-------------|-----------|----|--------|-----|
| inch                                                 | mm | inch  | mm   | inch      | mm  | Without                | With      |             | Module    |    | Rubber |     |
| 10.04" (255 mm) or wider in 3.35" (85 mm) increments |    | 1     | 25,4 | 0.343     | 8,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |



### RR 1600 – Dedicated Widths, Raised Rib

| Width |      | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |    |
|-------|------|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|----|
| inch  | mm   | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |    |
| 1.18  | 30   | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        | PP |
| 1.52  | 38,5 | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        | PP |
| 1.85  | 47   | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        | PP |
| 2.28  | 58   | 1     | 25,4 | 0.343     | 8,7 | Available              | Not Available | Raised Rib  | UP        | PP |




### 1110 – Modular Belts, Imperial Standard, Raised Rib

| Width                                             |    | Pitch |      | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |
|---------------------------------------------------|----|-------|------|-----------|-----|------------------------|---------------|-------------|-----------|
| inch                                              | mm | inch  | mm   | inch      | mm  | Without                | With          |             | Module    |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments |    | 1     | 25,4 | 0.378     | 9,6 | Available              | Not Available | Raised Rib  | UP PP     |


## Matveyor®

## 3/4" Pitch Medium Duty Belts and Chains




### 7300 – Modular Belts and Dedicated Widths, Imperial Standard, Solid Top

| Width                                           |       | Pitch |       | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |                                     |
|-------------------------------------------------|-------|-------|-------|-----------|-----|------------------------|---------------|-------------|-----------|-------------------------------------|
| inch                                            | mm    | inch  | mm    | inch      | mm  | Without                | With          |             | Module    |                                     |
| 3 1/4                                           | 82,6  | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 4 1/2                                           | 114,3 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 6                                               | 152,4 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 7 1/2                                           | 190,5 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| 9" (228,6mm) or wider in 3" (76,2mm) increments |       | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |



### 7300G ATM – Active Transfer Modules, Imperial Standard, Solid Top

|               | Width |       | Pitch |       | Thickness |     | Tracking Guide Version |           | Top Surface | Materials |                                     |
|---------------|-------|-------|-------|-------|-----------|-----|------------------------|-----------|-------------|-----------|-------------------------------------|
|               | inch  | mm    | inch  | mm    | inch      | mm  | Without                | With      |             | Module    |                                     |
| Left version  | 6.3   | 160   | 3/4   | 19,05 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| Right version | 6.3   | 160   | 3/4   | 19,05 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| Left version  | 9.3   | 236,2 | 3/4   | 19,05 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |
| Right version | 9.3   | 236,2 | 3/4   | 19,05 | 0.343     | 8,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> e-FAST <sup>2</sup> |



| 7200 – Modular Belts and Dedicated Widths, Imperial Standard, Flush Grid |       |       |       |           |     |                        |               |             |           |                 |
|--------------------------------------------------------------------------|-------|-------|-------|-----------|-----|------------------------|---------------|-------------|-----------|-----------------|
| Width                                                                    |       | Pitch |       | Thickness |     | Tracking Guide Version |               | Top Surface | Materials |                 |
| inch                                                                     | mm    | inch  | mm    | inch      | mm  | Without                | With          |             | Module    |                 |
| 3 1/4                                                                    | 82,6  | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Flush Grid  | UP        | DK <sup>2</sup> |
| 4 1/2                                                                    | 114,3 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Flush Grid  | UP        | DK <sup>2</sup> |
| 6                                                                        | 152,4 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Flush Grid  | UP        | DK <sup>2</sup> |
| 7 1/2                                                                    | 190,5 | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Available     | Flush Grid  | UP        | DK <sup>2</sup> |
| 9" (228,6mm) or wider in 3" (76,2mm) increments                          |       | 3/4   | 19,05 | 0.343     | 8,7 | Available              | Not Available | Flush Grid  | UP        | DK <sup>2</sup> |

# Matveyor®


## 1" Pitch Heavy Duty Belts and Chains



| USPM – Modular Belts and Dedicated Widths, Metric Standard, Solid Top |      |       |      |           |      |                        |           |             |           |                    |
|-----------------------------------------------------------------------|------|-------|------|-----------|------|------------------------|-----------|-------------|-----------|--------------------|
| Width                                                                 |      | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials |                    |
| inch                                                                  | mm   | inch  | mm   | inch      | mm   | Without                | With      |             | Module    |                    |
| 3.30                                                                  | 83,8 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP        | DK <sup>2</sup> AR |
| 3.35                                                                  | 85   | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Solid       | UP        | DK <sup>2</sup> AR |
| 6.69" (170 mm) or wider in 3.35" increments                           |      | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Solid       | UP        | DK <sup>2</sup> AR |




| USPMG ATM – Active Transfer Modules, Metric Standard, Solid Top |       |       |       |      |           |      |                        |           |             |                       |
|-----------------------------------------------------------------|-------|-------|-------|------|-----------|------|------------------------|-----------|-------------|-----------------------|
|                                                                 | Width |       | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials             |
|                                                                 | inch  | mm    | inch  | mm   | inch      | mm   | Without                | With      |             | Module                |
| Left version                                                    | 5.02  | 127,5 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Right version                                                   | 5.02  | 127,5 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |



| HF USPM – Modular Belts and Dedicated Widths, Metric Standard, Rubberized Surface, Full Cover |    |       |      |           |      |                        |           |             |           |    |        |     |
|-----------------------------------------------------------------------------------------------|----|-------|------|-----------|------|------------------------|-----------|-------------|-----------|----|--------|-----|
| Width                                                                                         |    | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials |    |        |     |
| inch                                                                                          | mm | inch  | mm   | inch      | mm   | Without                | With      |             | Module    |    | Rubber |     |
| 3.35                                                                                          | 85 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                                           |    | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |



| HFS USPM – Modular Belts, Metric Standard, Rubberized Surface, Side Indent |    |       |      |           |      |                        |           |             |           |    |        |     |
|----------------------------------------------------------------------------|----|-------|------|-----------|------|------------------------|-----------|-------------|-----------|----|--------|-----|
| Width                                                                      |    | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials |    |        |     |
| inch                                                                       | mm | inch  | mm   | inch      | mm   | Without                | With      |             | Module    |    | Rubber |     |
| 10.04" (255 mm) or wider in 3.35" (85 mm) increments                       |    | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Rubber      | ULF       | PP | TPE    | TPE |



| LBP USPM – Modular Belts and Dedicated Widths, Metric Standard, LBP Rollers |    |       |      |           |      |                        |           |             |           |        |
|-----------------------------------------------------------------------------|----|-------|------|-----------|------|------------------------|-----------|-------------|-----------|--------|
| Width                                                                       |    | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials |        |
| inch                                                                        | mm | inch  | mm   | inch      | mm   | Without                | With      |             | Module    | Roller |
| 3.35                                                                        | 85 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Rollers     | UP        | UP     |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                         |    | 1     | 25,4 | 0.500     | 12,7 | Available              | Available | Rollers     | UP        | UP     |




| LBP XSPM – Modular Belts and Dedicated Widths, Metric Standard, LBP Rollers, Safety Design |    |       |      |           |    |                        |           |             |           |        |
|--------------------------------------------------------------------------------------------|----|-------|------|-----------|----|------------------------|-----------|-------------|-----------|--------|
| Width                                                                                      |    | Pitch |      | Thickness |    | Tracking Guide Version |           | Top Surface | Materials |        |
| inch                                                                                       | mm | inch  | mm   | inch      | mm | Without                | With      |             | Module    | Roller |
| 3.35                                                                                       | 85 | 1     | 25,4 | 0.433     | 11 | Available              | Available | Rollers     | UP        | UP     |
| 6.69" (170 mm) or wider in 3.35" (85 mm) increments                                        |    | 1     | 25,4 | 0.433     | 11 | Available              | Available | Rollers     | UP        | UP     |



| USP – Modular Belts and Dedicated Widths, Imperial Standard, Solid Top |       |       |      |           |      |                        |               |             |           |                    |
|------------------------------------------------------------------------|-------|-------|------|-----------|------|------------------------|---------------|-------------|-----------|--------------------|
| Width                                                                  |       | Pitch |      | Thickness |      | Tracking Guide Version |               | Top Surface | Materials |                    |
| inch                                                                   | mm    | inch  | mm   | inch      | mm   | Without                | With          |             | Module    |                    |
| 3 ¼                                                                    | 82,6  | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 4 ½                                                                    | 114,3 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 7 ½                                                                    | 190,5 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 6" (152,4 mm) or wider in 3" (76,2 mm) increments                      |       | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> AR |




| USPG ATM – Active Transfer Modules, Imperial Standard, Solid Top |       |       |       |      |           |      |                        |           |             |                       |
|------------------------------------------------------------------|-------|-------|-------|------|-----------|------|------------------------|-----------|-------------|-----------------------|
|                                                                  | Width |       | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials             |
|                                                                  | inch  | mm    | inch  | mm   | inch      | mm   | Without                | With      |             | Module                |
| Left version                                                     | 6     | 152,4 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Left version                                                     | 9     | 228,6 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Right version                                                    | 6     | 152,4 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Right version                                                    | 9     | 228,6 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |




NEW

| 1305 – Modular Belts and Dedicated Widths, Imperial Standard, Solid Top |       |       |      |           |      |                        |               |             |           |                    |
|-------------------------------------------------------------------------|-------|-------|------|-----------|------|------------------------|---------------|-------------|-----------|--------------------|
| Width                                                                   |       | Pitch |      | Thickness |      | Tracking Guide Version |               | Top Surface | Materials |                    |
| inch                                                                    | mm    | inch  | mm   | inch      | mm   | Without                | With          |             | Module    |                    |
| 3 ¼                                                                     | 82,6  | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 4 ½                                                                     | 114,3 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 6                                                                       | 152,4 | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> AR |
| 7 ½                                                                     | 190,5 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Solid       | UP        | DK <sup>2</sup> AR |
| 15                                                                      | 381,0 | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> AR |
| 9" (228,6 mm) or wider in 3" (76,2 mm) increments                       |       | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Solid       | UP        | DK <sup>2</sup> AR |



NEW

| 1305G ATM – Active Transfer Modules, Imperial Standard, Solid Top |       |       |       |      |           |      |                        |           |             |                       |
|-------------------------------------------------------------------|-------|-------|-------|------|-----------|------|------------------------|-----------|-------------|-----------------------|
|                                                                   | Width |       | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials             |
|                                                                   | inch  | mm    | inch  | mm   | inch      | mm   | Without                | With      |             | Module                |
| Left version                                                      | 6.3   | 160,0 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Left version                                                      | 9.3   | 236,2 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Right version                                                     | 6.3   | 160,0 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |
| Right version                                                     | 9.3   | 236,2 | 1     | 25,4 | 0.500     | 12,7 | Not Available          | Available | Solid       | UP DK <sup>2</sup> AR |



NEW

| 1405 – Modular Belts and Dedicated Widths, Imperial Standard, Perforated Top |       |       |      |           |      |                        |               |             |           |  |
|------------------------------------------------------------------------------|-------|-------|------|-----------|------|------------------------|---------------|-------------|-----------|--|
| Width                                                                        |       | Pitch |      | Thickness |      | Tracking Guide Version |               | Top Surface | Materials |  |
| inch                                                                         | mm    | inch  | mm   | inch      | mm   | Without                | With          |             | Module    |  |
| 3 ¼                                                                          | 82,6  | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Perforated  | UP        |  |
| 4 ½                                                                          | 114,3 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Perforated  | UP        |  |
| 6                                                                            | 152,4 | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Perforated  | UP        |  |
| 7 ½                                                                          | 190,5 | 1     | 25,4 | 0.500     | 12,7 | Available              | Available     | Perforated  | UP        |  |
| 15                                                                           | 381,0 | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Perforated  | UP        |  |
| 9" (228,6 mm) or wider in 3" (76,2 mm) increments                            |       | 1     | 25,4 | 0.500     | 12,7 | Available              | Not Available | Perforated  | UP        |  |

# Matveyor®

## 1" Pitch Sideflexing Chains

### 783T – TAB, Solid Top, Light Duty

| Width |       | Pitch |      | Thickness |     | Sideflexing Radius |       | Top Surface | Materials |                 |                     |
|-------|-------|-------|------|-----------|-----|--------------------|-------|-------------|-----------|-----------------|---------------------|
| inch  | mm    | inch  | mm   | inch      | mm  | inch               | mm    |             | Plate     | NEW             |                     |
| 3 ¼   | 82,6  | 1     | 25,4 | 0.343     | 8,7 | 18                 | 457,2 | Solid       | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |
| 3.30  | 83,8  | 1     | 25,4 | 0.343     | 8,7 | 18                 | 457,2 | Solid       | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |
| 4 ½   | 114,3 | 1     | 25,4 | 0.343     | 8,7 | 24                 | 609,6 | Solid       | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |

### 783M – Magnetic, Solid Top, Light Duty

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Top Surface | Materials |                 |                     |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------------|-----------|-----------------|---------------------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  |             | Plate     | NEW             |                     |
| 3.30  | 83,8 | 1     | 25,4 | 0.343     | 8,7 | 19.685             | 500 | Solid       | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |

### 782M – Magnetic, Flush Grid, Light Duty

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Top Surface | Materials |                 |                     |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------------|-----------|-----------------|---------------------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  |             | Plate     | NEW             |                     |
| 3.30  | 83,8 | 1     | 25,4 | 0.343     | 8,7 | 19.685             | 500 | Flush Grid  | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |

### 763M – Magnetic, Solid Top, Light Duty

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Top Surface | Materials |                 |                     |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------------|-----------|-----------------|---------------------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  |             | Plate     | NEW             |                     |
| 3.30  | 83,8 | 1     | 25,4 | 0.343     | 8,7 | 19.685             | 500 | Solid       | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |

### 762M – Magnetic, Flush Grid, Light Duty

| Width |      | Pitch |      | Thickness |     | Sideflexing Radius |     | Top Surface | Materials |                 |                     |
|-------|------|-------|------|-----------|-----|--------------------|-----|-------------|-----------|-----------------|---------------------|
| inch  | mm   | inch  | mm   | inch      | mm  | inch               | mm  |             | Plate     | NEW             |                     |
| 3.30  | 83,8 | 1     | 25,4 | 0.343     | 8,7 | 19.685             | 500 | Flush Grid  | UP        | DK <sup>2</sup> | e-FAST <sup>2</sup> |

### 793T – TAB, Solid Top, Heavy Duty

| Width |       | Pitch |      | Thickness |      | Sideflexing Radius |       | Top Surface | Materials |                 |    |
|-------|-------|-------|------|-----------|------|--------------------|-------|-------------|-----------|-----------------|----|
| inch  | mm    | inch  | mm   | inch      | mm   | inch               | mm    |             | Plate     |                 |    |
| 3 ¼   | 82,6  | 1     | 25,4 | 0.50      | 12,7 | 18                 | 457,2 | Solid       | UP        | DK <sup>2</sup> | AR |
| 3.30  | 83,8  | 1     | 25,4 | 0.50      | 12,7 | 18                 | 457,2 | Solid       | UP        | DK <sup>2</sup> | AR |
| 4 ½   | 114,3 | 1     | 25,4 | 0.50      | 12,7 | 24                 | 609,6 | Solid       | UP        | DK <sup>2</sup> | AR |

### 793M – Magnetic, Solid Top, Heavy Duty

| Width |       | Pitch |      | Thickness |      | Sideflexing Radius |     | Top Surface | Materials |                 |    |
|-------|-------|-------|------|-----------|------|--------------------|-----|-------------|-----------|-----------------|----|
| inch  | mm    | inch  | mm   | inch      | mm   | inch               | mm  |             | Plate     |                 |    |
| 3.30  | 83,8  | 1     | 25,4 | 0.50      | 12,7 | 19.685             | 500 | Solid       | UP        | DK <sup>2</sup> | AR |
| 4 ½   | 114,3 | 1     | 25,4 | 0.50      | 12,7 | 19.685             | 500 | Solid       | UP        | DK <sup>2</sup> | AR |

### 793L – Low Pin Center, Solid Top, Heavy Duty


| Width |       | Pitch |      | Thickness |      | Sideflexing Radius |       | Top Surface | Materials |                 |  |
|-------|-------|-------|------|-----------|------|--------------------|-------|-------------|-----------|-----------------|--|
| inch  | mm    | inch  | mm   | inch      | mm   | inch               | mm    |             | Plate     |                 |  |
| 4 ½   | 114,3 | 1     | 25,4 | 0.50      | 12,7 | 24                 | 609,6 | Solid       | UP        | DK <sup>2</sup> |  |

## 1 1/4" Heavy Duty Sideflexing Belts



### 2556HTB – Modular Belts, Metric Standard, TAB+Bearing, Reinforced Outer Modules

| Width |     | Pitch |       | Thickness |      | Medium Sideflexing Radius |      | Top Surface | Materials |
|-------|-----|-------|-------|-----------|------|---------------------------|------|-------------|-----------|
| inch  | mm  | inch  | mm    | inch      | mm   | inch                      | mm   |             | Module    |
| 10.04 | 255 | 1 1/4 | 31,75 | 0.500     | 12,7 | 23.622                    | 600  | Flush Grid  | UP        |
| 13.39 | 340 | 1 1/4 | 31,75 | 0.500     | 12,7 | 31.496                    | 800  | Flush Grid  | UP        |
| 16.73 | 425 | 1 1/4 | 31,75 | 0.500     | 12,7 | 39.370                    | 1000 | Flush Grid  | UP        |
| 20.08 | 510 | 1 1/4 | 31,75 | 0.500     | 12,7 | 47.244                    | 1200 | Flush Grid  | UP        |
| 23.43 | 595 | 1 1/4 | 31,75 | 0.500     | 12,7 | 55.118                    | 1400 | Flush Grid  | UP        |
| 26.77 | 680 | 1 1/4 | 31,75 | 0.500     | 12,7 | 62.992                    | 1600 | Flush Grid  | UP        |
| 30.12 | 765 | 1 1/4 | 31,75 | 0.500     | 12,7 | 70.866                    | 1800 | Flush Grid  | UP        |
| 33.46 | 850 | 1 1/4 | 31,75 | 0.500     | 12,7 | 78.740                    | 2000 | Flush Grid  | UP        |

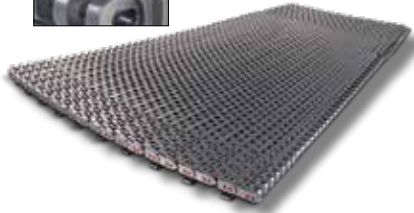

### 2556HTB-SR Modular Belts, Metric Standard, TAB+Bearing, Reinforced Outer Modules, Reduced Sideflexing Radius

| Width |     | Pitch |       | Thickness |      | Medium Sideflexing Radius |      | Top Surface | Materials |
|-------|-----|-------|-------|-----------|------|---------------------------|------|-------------|-----------|
| inch  | mm  | inch  | mm    | inch      | mm   | inch                      | mm   |             | Module    |
| 13.39 | 340 | 1 1/4 | 31,75 | 0.500     | 12,7 | 19.685                    | 500  | Flush Grid  | UP        |
| 16.73 | 425 | 1 1/4 | 31,75 | 0.500     | 12,7 | 23.622                    | 600  | Flush Grid  | UP        |
| 20.08 | 510 | 1 1/4 | 31,75 | 0.500     | 12,7 | 31.496                    | 800  | Flush Grid  | UP        |
| 23.43 | 595 | 1 1/4 | 31,75 | 0.500     | 12,7 | 39.370                    | 1000 | Flush Grid  | UP        |
| 26.77 | 680 | 1 1/4 | 31,75 | 0.500     | 12,7 | 47.244                    | 1200 | Flush Grid  | UP        |
| 30.12 | 765 | 1 1/4 | 31,75 | 0.500     | 12,7 | 55.118                    | 1400 | Flush Grid  | UP        |
| 33.46 | 850 | 1 1/4 | 31,75 | 0.500     | 12,7 | 62.992                    | 1600 | Flush Grid  | UP        |

NEW

## Heavy Duty Fixed Radius Belts

### 4650 – Modular Belts, Metric Standard, Solid Top

| Width |      | Thickness |     | Minimum Inner Sideflexing Radius |     | Top Surface | Materials |
|-------|------|-----------|-----|----------------------------------|-----|-------------|-----------|
| inch  | mm   | inch      | mm  | inch                             | mm  |             | Module    |
| 13.39 | 340  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 16.73 | 425  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 20.08 | 510  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 23.43 | 595  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 26.77 | 680  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 30.12 | 765  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 33.46 | 850  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 36.81 | 935  | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |
| 40.16 | 1020 | 0.343     | 8,7 | 23.622                           | 600 | Solid       | UP        |

NEW



Availability of belt version equipped with stainless steel bearings

### HF 4650 – Modular Belts, Metric Standard, Rubberized Top

| Width |      | Thickness |     | Minimum Inner Sideflexing Radius |     | Top Surface | Materials |
|-------|------|-----------|-----|----------------------------------|-----|-------------|-----------|
| inch  | mm   | inch      | mm  | inch                             | mm  |             | Module    |
| 13.39 | 340  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 16.73 | 425  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 20.08 | 510  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 23.43 | 595  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 26.77 | 680  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 30.12 | 765  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 33.46 | 850  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 36.81 | 935  | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |
| 40.16 | 1020 | 0.343     | 8,7 | 23.622                           | 600 | Rubber      | UP        |


NEW



Availability of belt version equipped with stainless steel bearings

# Matveyor®

## 2" Pitch Heavy Duty Raised Ribs Belts




| <b>3135</b> – Modular Belts, Imperial Standard, Raised Rib, Seamless Product Support at the Edges of the Belt |    |       |      |           |      |                        |               |             |           |
|---------------------------------------------------------------------------------------------------------------|----|-------|------|-----------|------|------------------------|---------------|-------------|-----------|
| Width                                                                                                         |    | Pitch |      | Thickness |      | Tracking Guide Version |               | Top Surface | Materials |
| inch                                                                                                          | mm | inch  | mm   | inch      | mm   | Without                | With          |             | Module    |
| 12" (304,8mm) or wider in 3" (76,2mm) increments                                                              |    | 2     | 50,8 | 0.580     | 14,2 | Available              | Not Available | Raised Rib  | PP        |

# ULTOP®

## 1 1/2" Heavy Duty UCC Chains



| <b>UCC</b> – Dedicated Widths, Imperial Standard, Solid Top |       |       |      |           |      |                        |               |             |                                                                                           |
|-------------------------------------------------------------|-------|-------|------|-----------|------|------------------------|---------------|-------------|-------------------------------------------------------------------------------------------|
| Width                                                       |       | Pitch |      | Thickness |      | Tracking Guide Version |               | Top Surface | Materials                                                                                 |
| inch                                                        | mm    | inch  | mm   | inch      | mm   | Without                | With          |             | Module                                                                                    |
| 3 1/4                                                       | 82,6  | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 4 1/2                                                       | 114,3 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 6                                                           | 152,4 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 7 1/2                                                       | 190,5 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 12                                                          | 304,8 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 15                                                          | 381,0 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 18                                                          | 457,2 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |
| 24                                                          | 609,6 | 1 1/2 | 38,1 | 0.500     | 12,7 | Available              | Not Available | Solid       |  ULF |



| <b>UCCG ATM</b> – Active Transfer Modules, Imperial Standard, Solid Top |       |       |      |           |      |                        |           |             |                                                                                           |
|-------------------------------------------------------------------------|-------|-------|------|-----------|------|------------------------|-----------|-------------|-------------------------------------------------------------------------------------------|
| Width                                                                   |       | Pitch |      | Thickness |      | Tracking Guide Version |           | Top Surface | Materials                                                                                 |
| inch                                                                    | mm    | inch  | mm   | inch      | mm   | Without                | With      |             | Module                                                                                    |
| 6 1/2                                                                   | 165,1 | 1 1/2 | 38,1 | 0.500     | 12,7 | Not Available          | Available | Solid       |  ULF |
| 9 1/2                                                                   | 241,3 | 1 1/2 | 38,1 | 0.500     | 12,7 | Not Available          | Available | Solid       |  ULF |



| <b>UCC 138</b> – Dedicated Widths, Imperial Standard, Solid Top |      |       |       |           |    |                        |               |             |           |
|-----------------------------------------------------------------|------|-------|-------|-----------|----|------------------------|---------------|-------------|-----------|
| Width                                                           |      | Pitch |       | Thickness |    | Tracking Guide Version |               | Top Surface | Materials |
| inch                                                            | mm   | inch  | mm    | inch      | mm | Without                | With          |             | Module    |
| 1.40                                                            | 34,9 | 3/4   | 19,05 | 0.591     | 15 | Available              | Not Available | Solid       | ULF       |

# Components

## Molded Sprockets.



For FliteTop® Chains,  
Matveyor® Belts and Chains,  
ULTOP® Chains

### Sprockets Type:

Drive Sprockets  
Idler Sprockets  
Idler Wheels

### Availability of:

Solid & Split Sprockets

### Bore Type:

Square (Metric - Imperial)  
Round (Metric - Imperial)

## Machined Sprockets.



For FliteTop® Chains,  
Matveyor® Belts and Chains,  
ULTOP® Chains

### Sprockets Type:

Drive Sprockets  
Idler Sprockets  
Idler Wheels

### Availability of:

Solid & Split Sprockets

### Bore Type:

Square (Metric - Imperial)  
Round (Metric - Imperial)

## Combs.



Transfer Combs for Raised  
Rib Belts and Chains

### For Belts/Chains:

RR 845  
HF RR 845  
RR 611  
RR 1500  
RR 1600  
1110  
3135

### Availability of:

Short Fingers  
Long Fingers

NEW

## Active Transfer Combs.




Active Transfer Combs for Raised  
Rib Belts

### For Belts/Chains:

3135

## Magnetic Curves.



For FliteTop® and Matveyor®  
Chains

Available in *e-SLIDE* material

## TAB Curves.



For FliteTop® and Matveyor®  
Chains

Available in *e-SLIDE* material


## Bevel Curves.



For FliteTop® Chains

Available in *e-SLIDE* material

## Low Pin Center Curves.



For Matveyor® Chains

Available in *e-SLIDE* material

# Components

## Static Nosebars.



For end-to-end transfer using Matveyor® Belts

**For belts:**  
½" Pitch Belts

## Dynamic Nosebars.



For end-to-end transfer using Matveyor® Belts

**For belts:**  
½" Pitch Belts

## Plastic Roller Transfer Plates.



For FliteTop® Chains, Matveyor® Belts and Chains, ULTOP® Chains

**Provide to:**  
Head to Tail Transfers  
90° Product Transfers

**Availability of:**  
2-3-5 roller rows  
85 & 115 mm widths

## Steel Roller Transfer Plates.



For Matveyor® Belts

**Provide to:**  
Head to Tail Transfers

**Availability of:**  
2-3 roller rows  
85 mm width

## Return Rollers.



For FliteTop® Chains, Matveyor® Belts and Chains, ULTOP® Chains

**Rollers type:**  
Solid  
Rubberized

**Availability of:**  
Standard version  
Flanged version

## Return Guide Flanges.




For FliteTop® Chains, Matveyor® Belts and Chains, ULTOP® Chains

## Return Shoe Guide.



For FliteTop® LBP Chains and Matveyor® LBP Belts

## Chain Guide Wear Strips.



For FliteTop® Chains, Matveyor® Belts and Chains, ULTOP® Chains

Available in **e-SLIDE** material

## Product Side Guide.



**Availability of:**  
Stainless steel clamp

## Turning Discs.



For FliteTop® 1700 Series Chains



## PERFORMANCE IN MOTION

### ITALY

REGINA CATENE CALIBRATE S.p.A.  
HEAD OFFICE:  
Via Monza, 90  
23870 Cernusco Lombardone (LC) - Italy  
Tel. +39 039 99801  
Fax +39 039 9905229  
sales@reginachain.net

### USA

REGINA USA, INC.  
305 E. Mahn Court  
Oak Creek, WI 53154 - USA  
Tel. 001 414 5710032  
Fax 001 414 5710225  
sales.us@reginachain.net

### FRANCE

REGINA INDUSTRIE s.a.r.l.  
Z.A.C. des Chatelliers  
34 Rue des Frères Lumière  
45800 Saint Jean De Braye - France  
Tel. +33 238 836363  
Fax +33 238 836413  
sales.fr@reginachain.net

### MEXICO

REGINA de MEXICO S.A. de C.V.  
Av. Aviación 5051-28  
Col. San Juan de Ocotan  
45019 Zapopan, Jalisco - Mexico  
Tel. +52 33 3627 4043  
Fax +52 33 3627 3930  
sales.mx@reginachain.net

### CHINA

REGINA TIANJIN CHAIN & BELT CO., LTD.  
Xi Qing Economic Development Area,  
Xiang Rui Road n. 17  
Tian Xiang Industrial Zone  
300385 Tian Jin - China  
Tel. +86 22 83961223  
Fax +86 22 83961202  
sales.cn@reginachain.net

### UNITED KINGDOM

REGINA INTERNATIONAL LIMITED  
Unit 1, Dyneley Road,  
Greenbank Business Park  
Whitebirk, Blackburn,  
Lancs BB1 3AB - United Kingdom  
Tel. +44 1254 661116  
Fax +44 1254 59456  
sales.uk@reginachain.net

### ARGENTINA

REGINA INTERNATIONAL S.A.  
Parque Industrial PIBA II- UF 35  
Martin de Gainza 1802 (B1736JTR), Trujui,  
Partido de Moreno, Buenos Aires - Argentina  
Tel. +54 11 1541411753  
sales.ar@reginachain.net

### GERMANY

REGINA CATENE CALIBRATE S.p.A.  
BRANCH  
Hangeneystasse 8  
44319 - Dortmund - Germany  
Tel. +49 231 95983001  
sales.de@reginachain.net

### SPAIN

CADENAS REGINA ESPAÑA, S.L.  
Calle Industria, 37  
08120 La Llagosta - Barcelona - España  
Tel. +34 93 5742838  
Fax +34 93 5740735  
sales.es@reginachain.net

### THE NETHERLANDS

SALES OFFICE  
Tel. +31 610681114  
sales.nl@reginachain.net

### INDIA

SALES OFFICE  
Tel. +91 9657009001  
sales.in@reginachain.net

